


Swivelpole™ R2 M1 & R2 M2 Maxis™ joint

Industrial
Commercial

R2 M1

Top
DN 40

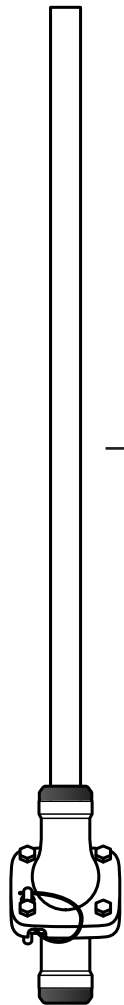

R2 M2

Top
DN 50



Overview

A Pole Top Section


B Maxis™ joint

- Designed for installation in accordance with IEC standards.
- Suitable for DN40 and DN50 existing rigid poles.
- Standard pole top finish: Hot-dip Galvanised (HG) or Aluminium (AL).
- Incorporates Zinc Aluminium coated Maxis™ joint.
- Compatible with Hot-Dip Galvanised and Aluminium existing rigid poles.
- Stainless Steel option coming soon (DN40 only).



Scan Code with QR Reader App for more information on Swivelpole™ R2 M1 & R2 M2 .

Product Coding Logic



Heights Specified Loads

Height Code	Installed Heights (Nominal)	Max Combined Weight
2400	2.4 m	20kg
3000	3 m	


Top Section Options

P	Plain Pole Top
---	----------------

Materials / Finishes

Structural Steel	
HG	Hot-dip Galvanised
AL	Aluminium

Related Components

<p>Luminaire & Equipment Mounts to suit popular light fixtures (luminaire) and equipment.</p>		<p>p. 47</p>
--	---	--------------