

# Catalogue No: **NNS 10**

## FUSE 10A 500V AC gG SIZE F1 60mm CENTRES

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuses and Fuse Holders > NHP Fuses and Fuse Holders > BS Fuse Links > Blade Type Offset Centre Tag



Representative Photo Only  
(actual product may vary based on configuration selections)

### Fuse 10A 500V AC gG Size F1 60mm Centres

- Complies to BS standard
- 80 kA fault interruption capacity
- Type gG for general, cable, line and motor protection
  - 2 to 63 A range
  - 415 V AC rated
- Type gM specifically for motor protection
  - 10M16 to 32M63 range
  - 415 V AC rated

#### SPECIFICATIONS

Product Series	NNS
Component Type Fuse-gear	Fuse Link
Fuse Current Rating	10 A
Fuse Characteristic Type(s)	gG
Fuse Cartridge Size	F1 size
Un, Nominal Operational Voltage, AC	500 V AC
Ue, Rated Operational Voltage, AC, max	500 V AC
Current, Breaking Capacity at Un	80 kA @Un
Height	60 mm
Width	14.2 mm
Depth	14.2 mm
Standards Compliance	AS 60269-1:2005 BS 88 DIN 43620 IEC 60269-1 IEC 60269-2 VDE 0636-10
Certifications	ASTA




# Catalogue No: **NNS 10**

## FUSE 10A 500V AC gG SIZE F1 60mm CENTRES

Power Distribution and Protection > Fuse Isolators and Fuse Gear > Fuses and Fuse Holders > NHP Fuses and Fuse Holders > BS Fuse Links > Blade Type Offset Centre Tag



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

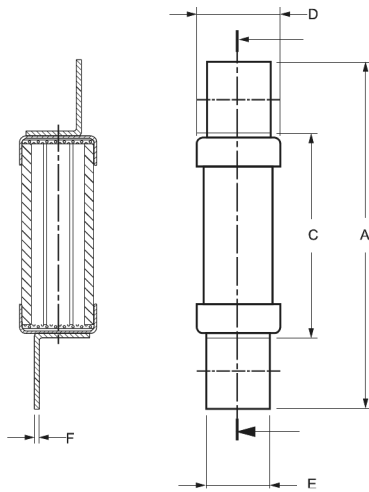

Series	Category	Brand	A Overall Length	B Fitting Centres	C Body Length	D Body Diameter	E Tag Width	F Tag Thickness	G Hole Length	H Hole Width
NNS2-32	F1	FuseMaster	60.0	-	35.0	14.2	11.0	0.8	-	-
NNS20M	F1	FuseMaster	62.0	-	35.0	14.3	11.5	0.8	-	-
NNS32M	F1	FuseMaster	62.0	-	39.0	17.5	11.5	0.8	-	-
NES20-63	F2	FuseMaster	69.0	-	39.0	17.5	15.0	1.4	-	-

Dimension Diagram