




CompactLogix 16 Point V AC/V DC Relay Output Module

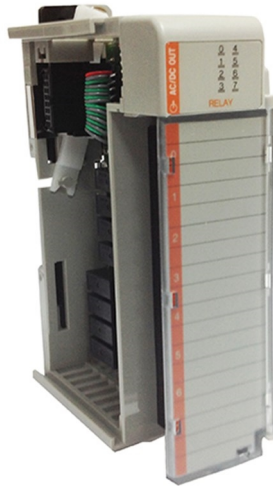

- AC and DC modules available
- I/O density from 8 to 32 points per module
- Solid state and relay contact output modules available
- High speed input modules
- Input filtering is standard
- Optical isolation available

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	CompactLogix (Bul. 1768 / 1769)
Component Type PLC & I/O	Digital Output Module
Number of Digital Outputs	16 qty
Digital Output Type	Relay type
Digital Output Range	5...265V AC / 5...125V DC
Type, Relay Output	NO AC/DC type
Rated Current per Digital Output, Max	2.5 A max, per DO
Rated Current per Module, Max	20 A max, per module
Operating Temperature, Max	60 °C max
Operating Temperature, Min	0 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Max	95 %RH
Humidity Type	Non-condensing

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-